

Automatic Shower Control SLS 02T




SLS 02T

Characteristics



- **hygienic flush**
- is destined for cold and hot water, temperature is regulated by thermostatic mixer
- safety fuse against scalding
- stop flowing of hot water in case of cold water failure
- water is flowing as long as an user is in the active range
- water stops flowing after the user leaves the active range sensor after adjustable time delay (can be set in range 0,25 - 7,75 s), standard 3 s
- function of automatic water stop after 5 minut of continuous flow
- monitoring of battery capacity (for models with index B)
- START/STOP program
- parameter adjustment using by the remote control SLD 03

Installation Drawing

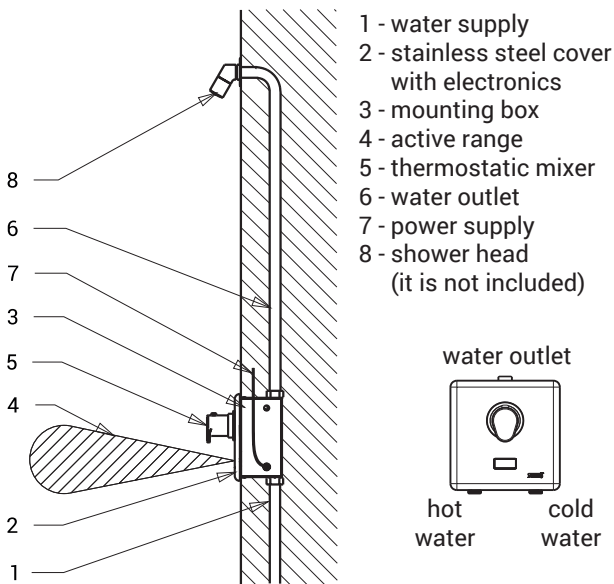

Technical Specification

Stainless steel cover dimension	170 x 170 x 10 mm
Mounting box dimension	150 x 160 x 65 mm
Operating voltage	
▪ SLS 02T	24 V DC
▪ SLS 02TB	6 V
Power input	
▪ by operating 24 V DC	7 W
▪ by operating 6 V	3 W
Battery life	
▪ 4 pcs. AA alkaline batteries AA, 1,5 V, 2700 mAh	approx. 2 years (100 uses per day)
Active range	
▪ standard	0,27 - 0,35 m
▪ START/STOP program	0,05 - 0,15 m
Recommended flow pressure	0,1 - 0,6 MPa
Rate of flow	12 l/min. (inf. data)
Water inlet	male thread G 3/4"
Water outlet	male thread G 3/4"

Supply Specification

SLS 02T	- Supply No. 02023	stainless steel cover with electronics, stainless steel mounting box with brass screw coupling, electromagnetic valve, ball valve and thermostatic mixer, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLS 02TB)
SLS 02TB	- Supply No. 02027	

Recommended Accessories

SLZ 01Y	- Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z	- Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y	- Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z	- Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X	- Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLZ 06	- Supply No. 05060	power supply 24 V DC for operating of max. 1 pc. of shower pcs. of showers
SLD 03	- Supply No. 07030	remote control for an adjustment of parameters
SLA 03	- Supply No. 06030	vandal-proof shower head with possibility to set an angle of water flow
SLA 13	- Supply No. 06130	vandal-proof shower head with possibility to set an angle of water flow
SLA 14	- Supply No. 06140	vandal-proof shower head
SLA 39	- Supply No. 06390	vandal-proof shower head
SLA 40	- Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow
SLA 36	- Supply No. 06360	set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B)
SLA 64	- Supply No. 06640	thermostatic valve nut spanner